

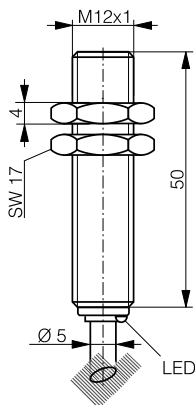



HOUSING	OPERATING DISTANCE	MOUNTING	<ul style="list-style-type: none"> ✓ Long operating distance ✓ Exceptional price-performance ratio ✓ Excellent accuracy 	<ul style="list-style-type: none"> ✓ IP 67 ✓ IO-Link v1.1
M12	8 mm	Quasi-embeddable		




DW-AD-52x-M12

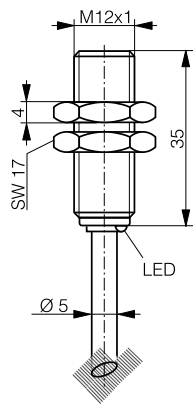

DW-AD-52x-M12-120

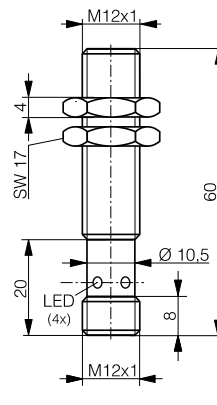

DW-AS-52x-M12

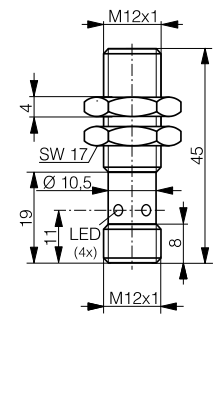

DW-AS-52x-M12-120

DETECTION DATA		INTERFACE	
Rated operating distance (S_n)	8 mm	Indicator LED, yellow	Sensing state ($0 \leq s \leq 0.8 S_r$)
Assured operating distance (S_a)	$\leq (0.81 \times S_n)$ mm	Indicator LED, yellow, blinking	Sensing state ($0.8 S_r < s \leq S_r$)
Repeat accuracy	≤ 0.4 mm	IO-Link	✓
Hysteresis	$3\% S_r \leq \text{Hyst} \leq 15\% S_r$	MTTF (@40°C)	1073 y
Temperature drift	$\leq 10\% S_r$		
Standard target	24 x 24 x 1 mm ³ , FE360		

Note: $0.9S_n \leq S_a \leq 1.1S_n$.

ELECTRICAL DATA		MECHANICAL DATA	
Supply voltage range (U_B)	10...30 VDC	Mounting	Quasi-embeddable
Residual ripple	$\leq 20\% U_B$	Housing material	Chrome-plated brass
Output current	≤ 200 mA	Sensing face material	PBTP
Output voltage drop	≤ 2.0 VDC	Max tightening torque	10 Nm (6 Nm first 10 mm)
Power consumption (no-load)	≤ 10 mA	Ambient operating temperature	-25...+70°C ¹
Residual current	≤ 0.1 mA	Enclosure rating	IP 67
Switching frequency	≤ 400 Hz	Weight (cable / connector)	see page 2
Short-circuit protection	✓	Shock and vibration	IEC 60947-5-2 / 7.4
Voltage reversal protection	✓		
Cable length max.	≤ 300 m		

¹Maximum temperature according to UL: 70°C.


Note: all data measured according to IEC 60947-5-2 standard with $U_B = 20 \dots 30$ VDC, $T_a = 23^\circ\text{C} \pm 5^\circ\text{C}$.

CORRECTION FACTORS

Steel FE 360	1	Copper	0.23	Aluminum	0.27	Brass	0.36	Stainless S. V2A 1 / 2 mm	0.67
--------------	----------	--------	-------------	----------	-------------	-------	-------------	---------------------------	-------------

Note: the operating distance of the sensor must be multiplied by the correction factor of the material. For example, the operating distance on Aluminum is $S_{n,Al} = S_n \times CF_{Al}$. In case of embeddable mounting, the distance is multiplied by the additional correction factor of the support, thus $S_{n,Al} = S_n \times CF_{Al} \times CF_{emb,Al}$.

INSTALLATION CONDITIONS

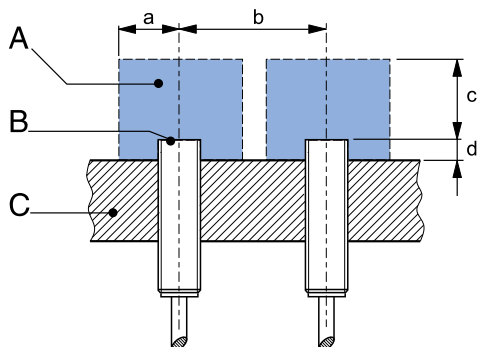

A : metal free zone a : 14 mm d : steel 0mm
 B : sensing face b : 30 mm
 C : support c : 24 mm

IO-LINK FUNCTIONALITIES

IO-Link version	1.1
SIO mode	Supported
Process data	7-bit input
Baudrate	COM2 (38.4 kBaud)
Minimum cycle time	10.4 ms
ISDU	Not supported



IODD files may be downloaded from

www.contrinx.com/product-range/inductive-sensors/.



Select the product name to display the product page with corresponding downloads.

Alternatively, just click/scan the QR code on the left.

Note: additional installation information can be found in the glossary of the Contrinex General Catalog.

WIRING DIAGRAM

PIN ASSIGNMENT



AVAILABLE TYPES

Part number	Part reference	Polarity	Connection	Output on pin 2	Output on pin 4 / bk	Weight
330-020-125	DW-AD-521-M12	NPN	PVC, 2 m, 3 wire	-	Normally open (NO)	92 g
330-020-126	DW-AD-522-M12	NPN	PVC, 2 m, 3 wire	-	Normally close (NC)	92 g
330-020-127	DW-AD-523-M12	PNP	PVC, 2 m, 3 wire	-	Normally open (NO) / IO-Link	92 g
330-020-128	DW-AD-524-M12	PNP	PVC, 2 m, 3 wire	-	Normally close (NC)	92 g
330-020-129	DW-AD-521-M12-120	NPN	PVC, 2 m, 3 wire	-	Normally open (NO)	87 g
330-020-130	DW-AD-522-M12-120	NPN	PVC, 2 m, 3 wire	-	Normally close (NC)	87 g
330-020-131	DW-AD-523-M12-120	PNP	PVC, 2 m, 3 wire	-	Normally open (NO) / IO-Link	87 g
330-020-132	DW-AD-524-M12-120	PNP	PVC, 2 m, 3 wire	-	Normally close (NC)	87 g
330-020-154	DW-AS-521-M12	NPN	M12 4-pin	-	Normally open (NO)	27 g
330-020-155	DW-AS-521-M12-120	NPN	M12 4-pin	-	Normally open (NO)	23 g
330-020-156	DW-AS-522-M12	NPN	M12 4-pin	Normally close (NC)	-	27 g
330-020-157	DW-AS-522-M12-120	NPN	M12 4-pin	Normally close (NC)	-	23 g
330-020-158	DW-AS-523-M12	PNP	M12 4-pin	-	Normally open (NO) / IO-Link	27 g
330-020-159	DW-AS-523-M12-120	PNP	M12 4-pin	-	Normally open (NO) / IO-Link	23 g
330-020-160	DW-AS-524-M12	PNP	M12 4-pin	Normally close (NC)	-	27 g
330-020-161	DW-AS-524-M12-120	PNP	M12 4-pin	Normally close (NC)	-	23 g